

# VINTAGE KING AUDIO

## RACK 500 RACK EAR INSTALLATION



### WE'VE MADE IT EASY

Here are the instructions for installing your new Vintage King Rack 500 Rack Ears. If you follow each step, it should take about 15 minutes — just be sure to separate the screws and it'll be a cinch. We've worked hard to make the instructions as helpful as possible, but should you have questions at any step along the way, we're here to help at [techsupport@vintageking.com](mailto:techsupport@vintageking.com).

If you're ready, let's get started.

### BEFORE YOU START

Unplug your Vintage King Rack 500 from the power source (VERY IMPORTANT). If you have modules installed, remove them and unplug all audio connections to the rear panel.

Tools required

- #1 Phillips-head screwdriver
- #2 Phillips-head screwdriver

*Note: Do NOT use a powered screwdriver! You will risk damaging the screws or rack.*

## 1. UNPLUG EVERYTHING




Turn off the rack, unplug the power cable, remove all audio connections and any modules you may have installed.

## 2. REMOVE FEET FROM BOTTOM



Using a #2 Phillips-head, unscrew all four (4) rubber feet from the bottom of your rack. Keep them together in a plastic bag, in case you ever want to put them back on.

## 3. REMOVE TOP PANEL

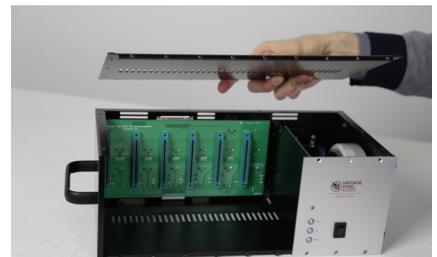

Using a #1 Phillips-head, remove all ten (10) screws from the top panel and the three (3) front panel screws at the top of the rack. Remove the top panel and set it aside.

## 4. REMOVE BOTTOM PANEL



Using a #1 Phillips-head, remove all ten (10) screws from the bottom panel and the three (3) front panel screws at the bottom of the rack. Remove the bottom panel and set it aside.

## 5. REMOVE HANDLE



Using a #2 Phillips-head, remove the two (2) screws securing the handle. Set the screws and handle aside; they will be used to secure the left rack ear in the next step.

## 6. INSTALL LEFT RACK EAR




Put the left rack ear (with VK logo) in place and reattach the handle, securing the screws through the rack ear. Tighten screws to secure the rack ear with your #2 Phillips-head.

## 7. INSTALL RIGHT RACK EAR



Put the right rack ear in place and use the hardware supplied with the rack ear kit. Insert the screws with washers through the outside of the rack and tighten the supplied hex nuts on the inside using your #1 Phillips-head.

## 8. REPLACE TOP & BOTTOM PANELS

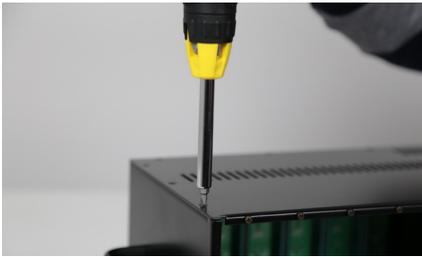

Put the top panel back on with the ten (10) top screws, then do the same with the bottom panel and ten (10) bottom screws. Then reinstall the six (6) front panel screws.

## 9. FINISHED



Success! You can now reinstall your modules, hook everything up and record away, with your Vintage King Rack 500 installed in any 19" rack.