

VINTAGE KING AUDIO

RACK 500 SIDE FEET INSTALLATION



WE'VE MADE IT EASY

Here are the instructions for moving the rubber feet from the bottom to the sides of your Vintage King Rack 500. If you follow each step, it should take about 15 minutes — just be sure to separate the screws and it'll be a cinch. We've worked hard to make the instructions as helpful as possible, but should you have questions at any step along the way, we're here to help at techsupport@vintageking.com.

If you're ready, let's get started.

BEFORE YOU START

Unplug your Vintage King Rack 500 from the power source (VERY IMPORTANT). If you have modules installed, remove them and unplug all audio connections to the rear panel.

Tools required

- #1 Phillips-head screwdriver
- #2 Phillips-head screwdriver

Note: Do NOT use a powered screwdriver! You will risk damaging the screws or rack.

1. UNPLUG EVERYTHING



Turn off the rack, unplug the power cable, remove all audio connections and any modules you may have installed.

2. REMOVE FEET FROM BOTTOM



Using a #2 Phillips-head, unscrew all four (4) rubber feet from the bottom of your rack. Set the feet, screws, and nuts (supplied separately with your rack) aside for now.

3. REMOVE TOP PANEL



Using a #1 Phillips-head, remove all ten (10) screws from the top panel and the three (3) front panel screws at the top of the rack. Remove the top panel and set it aside.

4. INSTALL TOP FEET



Carefully install the bottom two (2) top feet in the side of the rack through the existing screw holes. Secure the screws with your #2 Phillips-head and the hex nuts provided separately with your rack.

5. REPLACE TOP PANEL




Put the top panel back in place, replace the top three (3) front panel screws, and then all ten (10) top panel screws with your #1 Phillips-head.

6. REMOVE BOTTOM PANEL




Using your #1 Phillips-head, remove all ten (10) screws from the bottom panel and the three (3) front panel screws at the bottom of the rack. Remove the bottom panel and set it aside.

7. INSTALL BOTTOM FEET

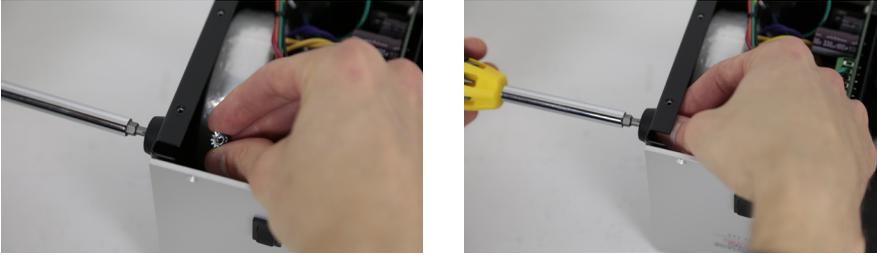

Carefully install the bottom two (2) bottom feet in the side of the rack through the existing screw holes. Secure the screws with your #2 Phillips-head and the hex nuts provided separately with your rack.

8. REPLACE BOTTOM PANEL

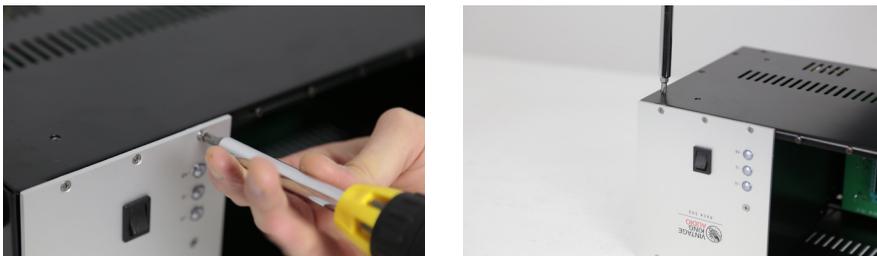

Put the bottom panel back in place, replace the bottom three (3) front panel screws, and then all ten (10) bottom panel screws with your #1 Phillips-head.

9. FINISHED



Success! You can now reinstall your modules, hook everything up and record away, with your Vintage King Rack 500 sitting safely on its side.