


# VINTAGE KING AUDIO

## RACK 500 WOOD PANEL INSTALLATION

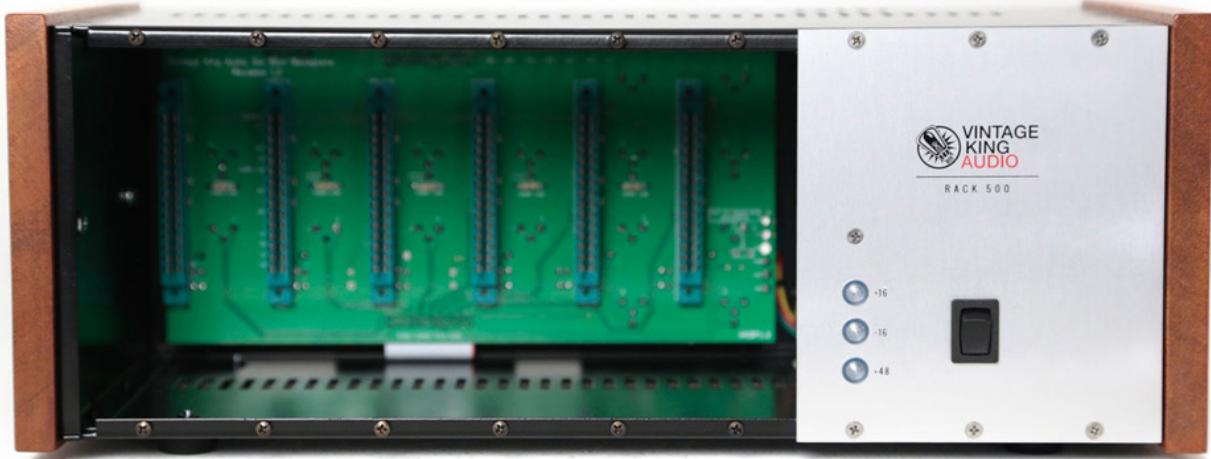

### WE'VE MADE IT EASY

Here are the instructions for installing your new wood side panels. If you follow each step, it should take about 15 minutes — just be sure to separate the screws and it'll be a cinch. We've worked hard to make the instructions as helpful as possible, but should you have questions at any step along the way, we're here to help at [techsupport@vintageking.com](mailto:techsupport@vintageking.com).

If you're ready, let's get started.

### BEFORE YOU START

Unplug your Vintage King Rack 500 from the power source (VERY IMPORTANT). If you have modules installed, remove them and unplug all audio connections to the rear panel.

Tools required

- #1 Phillips-head screwdriver
- #2 Phillips-head screwdriver


*Note: Do NOT use a powered screwdriver! You will risk damaging the screws or rack.*

# 1. UNPLUG EVERYTHING



Turn off the rack, unplug the power cable, remove all audio connections and any modules you may have installed.

# 2. REMOVE TOP PANEL

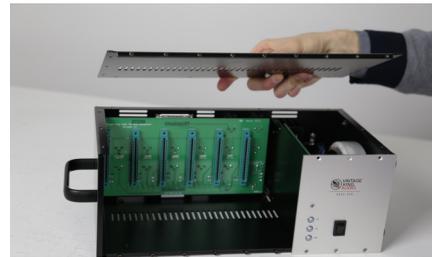

Using a #1 Phillips-head, remove all ten (10) screws from the top panel and the three (3) front panel screws at the top of the rack. Remove the top panel and set it aside.

# 3. REMOVE BOTTOM PANEL





Using a #1 Phillips-head, remove all ten (10) screws from the bottom panel and the three (3) front panel screws at the bottom of the rack. Remove the bottom panel and set it aside.

## 4. REMOVE HANDLE





Using a #2 Phillips-head, remove the two (2) screws securing the handle. Set the screws aside; they will be used to secure the left wood panel in the next step. Store the handle in a safe place, in case you ever want to reattach it.

## 5. INSTALL LEFT WOOD PANEL

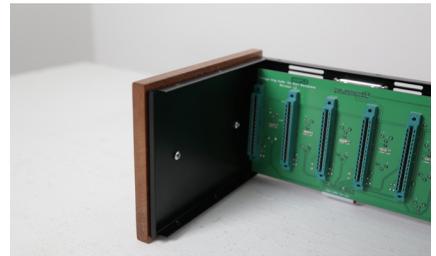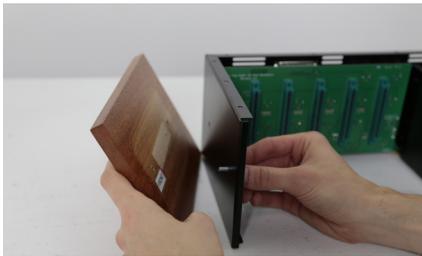

Put the left wood panel in place with the "FRONT" sticker toward the front of the rack. Use the two (2) screws from the handle assembly and your #2 Phillips-head to secure and tighten the wood panel in place.

## 6. INSTALL RIGHT WOOD PANEL

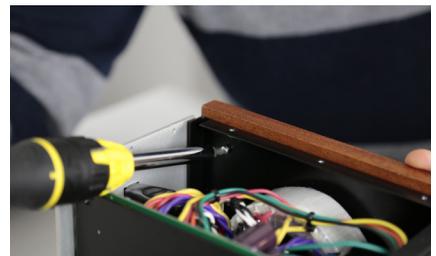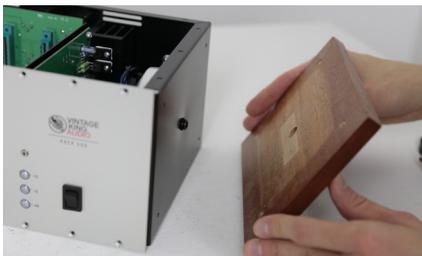

Put the right wood panel in place (orientation shouldn't matter) and install the four (4) screws supplied with the wood panel kit and your #1 Phillips-head.

## 7. REPLACE TOP PANEL




Put the top panel back in place, replace the top three (3) front panel screws, and then all ten (10) top panel screws.

## 8. REPLACE BOTTOM PANEL



Put the top panel back on with the ten (10) top screws, then do the same with the bottom panel and ten (10) bottom screws. Then reinstall the six (6) front panel screws.

## 9. FINISHED

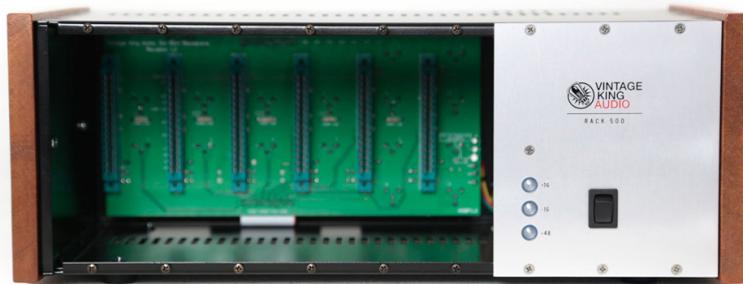

Success! You can now reinstall your modules, hook everything up and record away, with your beautiful new wood-paneled Vintage King Rack 500.