
William Mathewson Devices
Denver, CO
http://wmdevices.com
303-549-9205
sales@wmdevices.com

Utility Parametric EQ

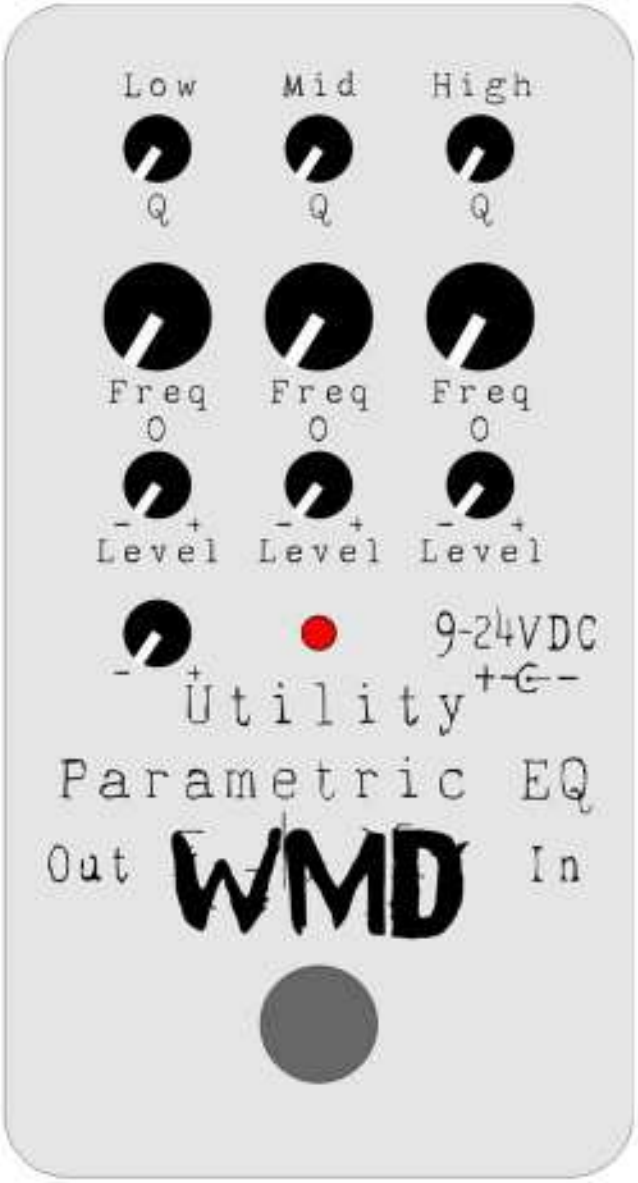

Thank you for purchasing the WMD Utility Parametric EQ. This pedal will allow you to shape your tone easily to bring out frequencies you want and suppress ones you don't.

Power is provided by a standard BOSS style connector (center negative). Use 9-24 volts for the power supply. Higher voltage allows for higher headroom. There is no space for a battery, so you must use a power supply.

The Controls

The Parametric EQ is organized into three columns. Each column is one band of equalization. From left to right, low frequencies to high frequencies.

The **Freq** control adjusts the frequency of the EQ band. Sweep this to find what you want to boost or cut.

The **Q** control adjusts the sharpness of the EQ band. Higher settings cause more resonance at the center frequency.

The **Level** control sets boost and cut of the EQ band. At 12 o'clock, the EQ band is out of the circuit. Turn towards "**+**" to boost, turn towards "**-**" to cut.

Please note that the bands are interactive, if you are not using a band, set the Q to zero to ensure it does not interact with the other EQ bands.

The foot switch removes the Utility Parametric EQ from the cicuit. It is wired true bypass, and will not affect your tone when bypassed. The effect is in your chain when the **Red LED** is on.

The final control is the master level knob, directly below the Low Band Level control. Use this to set the desired amount of gain overall.

Warranty

All WMD pedals are warranted against manufacturer defects for 1 year from date of purchase. If you think your pedal is malfunctioning, contact us and we will take care of you.