
# WMD Quad Anti Aliasing Filter Quickstart

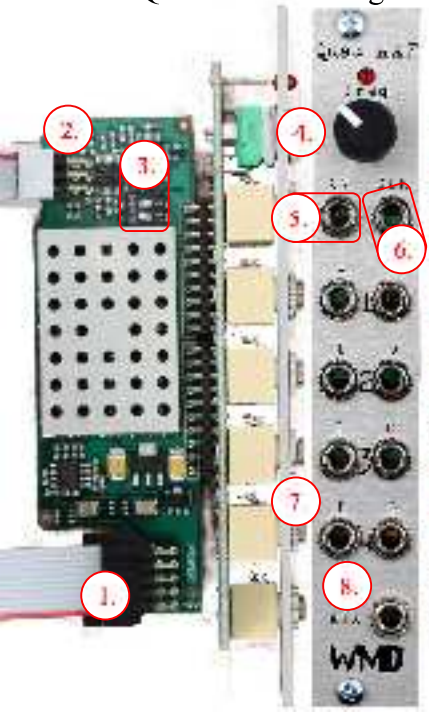


- 1. Power - Red Stripe down towards -12

- 2. PIO Connection - Red Stripe up. Connect to Upper connector on PIO MKI or "QAAF" on PIO MKII. Strip: DP

- 3. DIP Switches: Switch 1 (when) should be ON when a PIO is connected. Switch 2 (when ON) limits the minimum cutoff frequency to about 200Hz

- 4. Filter cutoff frequency

- 5. CV input. Roughly 1V/octave.

- 6. Clock input. Controls the filters directly with a high-speed clock

- 7. Inputs. Are mulled to the 8 pin header. Outputs are on the right.

- 8. Mix Output: mixes all signals to a pair of 1/4

The QAAF is warranted against manufacturer defects for 12 months after date of purchase.

Current consumption is 35 mA for each of the 4HP IDs (it is 52mm